


SPILLI CONICI SERIE 9595 X 08 W

Carburatore PHBG

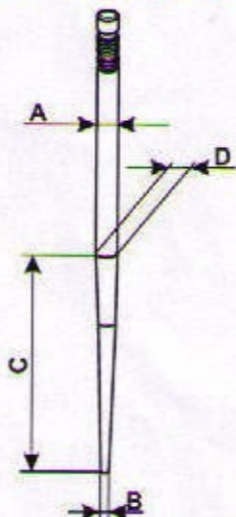

TIPO	VALORE X	Caratteristiche Espresso in mm.		
		ØA	ØB	C
W1	1	2.48	0.60	24
W2	2	2.48	0.60	22
W3	3	2.48	1.40	20
W4	4	2.48	1.40	18
W5	5	2.48	1.40	18
W6	6	2.50	1.00	24
W7	7	2.50	1.40	18
W8	8	2.50	1.40	16
W9	9	2.50	1.40	20
W10	10	2.50	1.80	16
W11	11	2.50	1.80	18
W12	12	2.50	1.80	20
W13	13	2.50	0.60	22
W14	14	2.50	0.60	24
W15	15	2.50	0.60	26
□ W16	16	2.60	1.00	22
□ W17	17	2.50	1.00	26
W18	18	2.48	0.60	24
W19	19	2.50	1.80	20
□ W20	20	2.50	1.60	24
□ W21	21	2.50	1.60	24
□ W22	22	2.50	0.60	26
○ W23	23	2.50	0.60	26
W24	24	2.50	1.80	24
W25	25	2.50	1.80	22
W26	26	2.50	0.98	24

□ = Costruito in alluminio anodizzato

○ = Differisce da W 15 per avere una lunghezza di 42,6